

## FEATHER-LIGHT STEEL-TOUGH

### Galaxy Series

BMT-G4/088A | 365W

Ideal for C&I Roof Tops/ Patio/Pergola/Shed & Solar Trailer/Flat Roof

Galaxy Series is a lightweight solar panel product designed for industrial and commercial applications. With an ultra-lightweight design and PPO edge protection, Galaxy is especially ideal for low load-bearing and poor waterproofing roofs while ensuring power generation efficiency. It is worth mentioning that the 1.6mm ultra-thin glass is added to Galaxy, which greatly helps improve its ability to resist strong impact from wind and hail, bringing durability and safety to buildings with all-weather protection. Furthermore, various installation methods and the integrated design also enable rapid and streamlined installation, resulting in significant cost savings out of reduced labor time.



#### Ultra-lightweight

- The lightest weighs 5.6 kg/m<sup>2</sup>
- Up to 60% lighter than conventional module
- Suitable for roofs with a low load-bearing capacity



#### Various & Quick Installation

- 3 Min/pcs rapid installation
- Clamps for metal roofs
- Glue for flat roofs



#### High Reliability & Durability


- Wind-Resistant – Withstands 166–183km/h
- Hail test – Passed 25mm Impact Test
- Snow Load Ready – Up to 2400Pa



#### High Power Generation

- No roof penetration
- High-efficiency TOPCon cells
- 2% less generation loss<sup>3</sup> with ventilation design
- Up to 219W per square meter of power generation


<sup>3</sup>Based on internal lab test

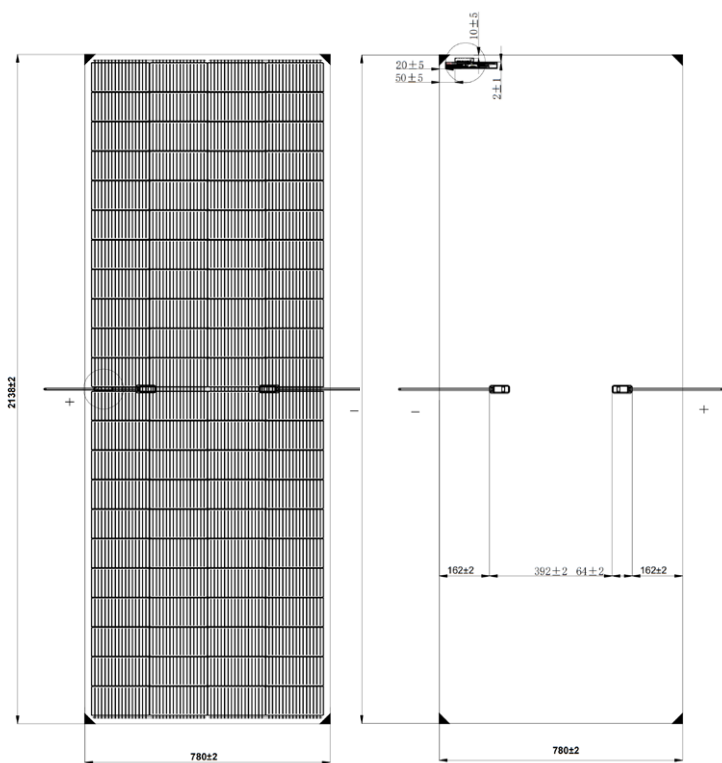

BMT-G4/088A

**30-year power generation performance guarantee**

- ✓ 1% degradation in the first year
- ✓ 12-year product warranty
- ✓ 0.4% decay per year
- ✓ 30-year power guarantee

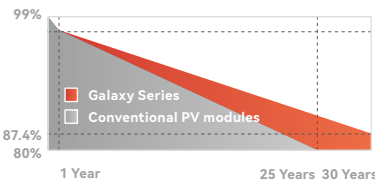

**Working Parameters**

Maximum System Voltage	1500V
Maximum Fuse Rating Operation	25A
Temperature Range	-40° C ~+85° C
Hail Test	Hail diameter: 25mm Specified speed: 23m/s
The Rated Operating Temperature	45±2°C
Fire-resistant Class	C
Ingress Protection Rating	IP67
Protection Class	II

**Temperature Parameters**

Isc TP	0.03%/°C
Voc TP	-0.27%/°C
Pmp TP	-0.30%/°C

\*With PPO edge protection to reduce the risk of glass damage from corner impacts.

**Structural Data**

**BMT-G4/088A**

Size	2138±2*780±2*5±1mm
Weight	9.3±0.7kg
Unit Weight	5.6±0.4kg/m²
Front Surface	1.6mm tempered glass
Cell Type	TOPCon Half Cells (88pcs)
Frame	Frameless*

**Electrical Data (STC)**

Max Power (Pmax)	365W
Power/ m² (W/m² )	219W/m²
Efficiency (%)	21.9%
Voltage at Max Power (Vmpp)	27.53V
Voltage at Open Circuit (Voc)	32.42V
Current at Max Power (Impp)	13.26A
Current at Short Circuit (Isc)	13.87A

**Load Capacity**

Maximum static load on the front	2400Pa
Maximum static load on rear side	2400Pa

